



EZ Way, Inc.

"Your Total Patient
Lift Solution"

EZ CEILING LIFT

A battery-operated patient lift that is mounted in tracks that are installed into the ceiling. The lift is used with a sling or walking harness to transfer the patient along the track.



Portable Model

MODELS

CL650 - 650 lbs. Ceiling lift

CL1000 - 1000 lbs. Ceiling lift

CL650PM - Portable 650 lbs. Ceiling lift

SAFE

- Overload protection
- Dual pawl emergency brake system
- Emergency down control
- 2" wide lift strap
- Low battery protection
- Visual battery gauge
- 4-point spreader bar for maximum patient comfort

DURABLE

- All-metal drive train
- 20 amp high torque motor
- 120 lifts per charge

INTELLIGENT


- On-board intelligence-to-monitor usage
- Backlit LCD screen
- Usage time captured

OPTIONS


- Inspection reminder
- Power traverse
- Continuous charge



"Your Total Patient Lift Solution"

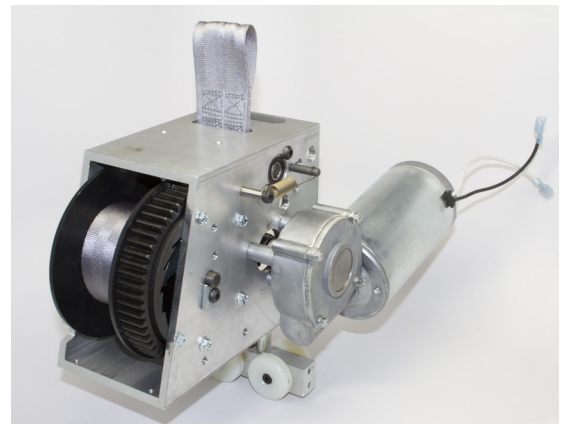

Heavy duty motor and extra wide gear are designed for long life with continual use.

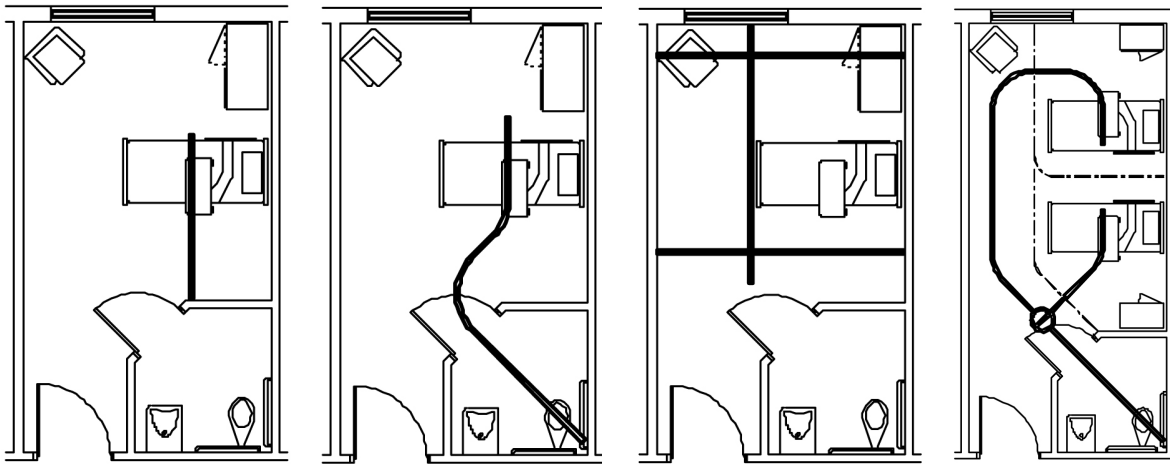

TRACK LAYOUTS
These are just a few of the many track layout options available for specific needs including curves, turntables, door pass through and XY axis configurations.

ADDITIONAL FEATURES

- Emergency Down
- Emergency Stop
- Manual Down
- Strap Tension and Angle Protection
- Over Current Protection
- Low Battery Cut-Off
- Emergency Brake

	CL650PM	CL650	CL1000
Capacity	650 lbs. (295 kg)		1000 lbs. (454 kg)
Size	14.25" x 19.125" x 9.125" (36.2 x 48.5 x 23.2 cm)	14.25" x 12.25" x 6.25" (36.2 x 31 x 16 cm)	
Overall Weight	27 lbs. (12.2 kg)	29 lbs. (13.2 kg)	31 lbs. (14 kg)
Traversing	Manual	Manual / Optional Power Traverse	
Lifting Belt	2" (5.1 cm) wide, 94" (2.4 m) spoolable length		
Up/Down Speed	3.42 cm/second		2.3 cm/second
Drive Train	All metal gearing		
Braking System	Dual-pawl emergency brake		
Batteries	2-12 V SLA, 4.0 Ah	2-12 V SLA, 5.0 Ah	
Charger Input	120 VAC, 60 Hz, 1 Amp, Power Cord (NEMA 5)		
Lift Cycles Per Charge	Approx. 120 @ 200 lbs. (90.7 kg) load		Approx. 50 @ 500 lbs. (226.8 kg) load
Controls	Hand-held remote, plus on-board controls, electronic soft-start and soft-stop		
Motor Rating	20 Amp		
Signals/Alerts	Power-on, Connected-to-charger, Low battery, Emergency down, Overload, Overheat, Start-up electrical fault modes		
Safety Features	Emergency Down, Emergency Stop, Manual Down, Strap Tension and Angle Protection, Over Current Protection, Low Battery Cut-Off, Emergency Brake		