



EZ Way, Inc.

"Your Total Patient  
Lift Solution"

# EZ CEILING LIFT

**A battery-operated patient lift that is mounted in tracks that are installed into the ceiling. The lift is used with a sling or walking harness to transfer the patient along the track.**



**Portable** Model

## MODELS

**CL650** - 650 lbs. Ceiling lift

**CL1000** - 1000 lbs. Ceiling lift

**CL650PM** - Portable 650 lbs. Ceiling lift

## SAFE

- Overload protection
- Dual pawl emergency brake system
- Emergency down control
- 2" wide lift strap
- Low battery protection
- Visual battery gauge
- 4-point spreader bar for maximum patient comfort

## DURABLE

- All-metal drive train
- 20 amp high torque motor
- 120 lifts per charge

## INTELLIGENT


- On-board intelligence-to-monitor usage
- Backlit LCD screen
- Usage time captured

## OPTIONS


- Inspection reminder
- Power traverse
- Continuous charge



*"Your Total Patient Lift Solution"*

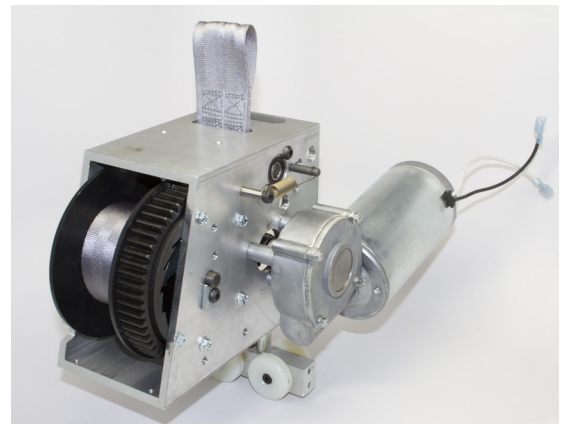

**Heavy duty motor** and extra wide gear are designed for long life with continual use.

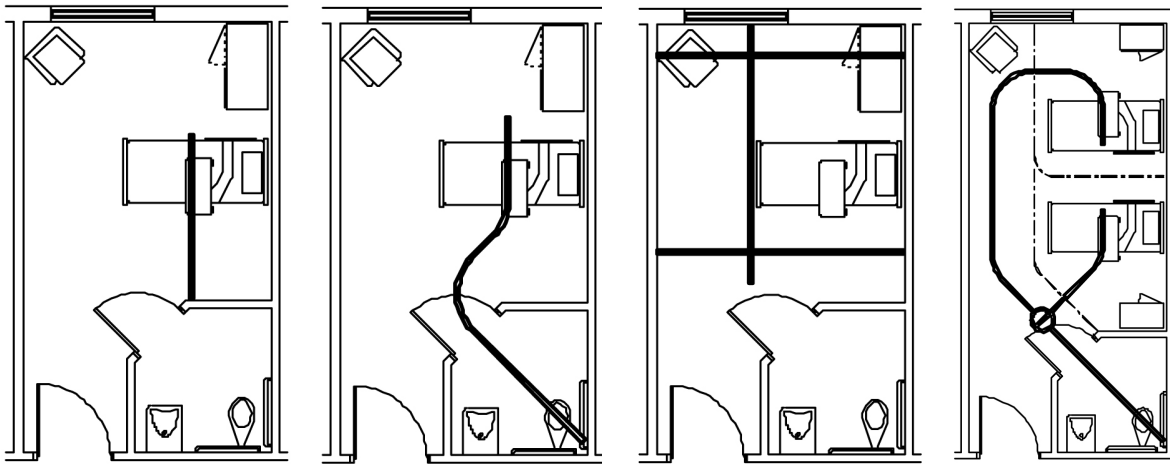

**TRACK LAYOUTS**  
These are just a few of the many track layout options available for specific needs including curves, turntables, door pass through and XY axis configurations.

### ADDITIONAL FEATURES

- Emergency Down
- Emergency Stop
- Manual Down
- Strap Tension and Angle Protection
- Over Current Protection
- Low Battery Cut-Off
- Emergency Brake

	CL650PM	CL650	CL1000
<b>Capacity</b>	650 lbs. (295 kg)		1000 lbs. (454 kg)
<b>Size</b>	14.25" x 19.125" x 9.125" (36.2 x 48.5 x 23.2 cm)	14.25" x 12.25" x 6.25" (36.2 x 31 x 16 cm)	
<b>Overall Weight</b>	27 lbs. (12.2 kg)	29 lbs. (13.2 kg)	31 lbs. (14 kg)
<b>Traversing</b>	Manual	Manual / Optional Power Traverse	
<b>Lifting Belt</b>	2" (5.1 cm) wide, 94" (2.4 m) spoolable length		
<b>Up/Down Speed</b>	3.42 cm/second		2.3 cm/second
<b>Drive Train</b>	All metal gearing		
<b>Braking System</b>	Dual-pawl emergency brake		
<b>Batteries</b>	2-12 V SLA, 4.0 Ah	2-12 V SLA, 5.0 Ah	
<b>Charger Input</b>	120 VAC, 60 Hz, 1 Amp, Power Cord (NEMA 5)		
<b>Lift Cycles Per Charge</b>	Approx. 120 @ 200 lbs. (90.7 kg) load		Approx. 50 @ 500 lbs. (226.8 kg) load
<b>Controls</b>	Hand-held remote, plus on-board controls, electronic soft-start and soft-stop		
<b>Motor Rating</b>	20 Amp		
<b>Signals/Alerts</b>	Power-on, Connected-to-charger, Low battery, Emergency down, Overload, Overheat, Start-up electrical fault modes		
<b>Safety Features</b>	Emergency Down, Emergency Stop, Manual Down, Strap Tension and Angle Protection, Over Current Protection, Low Battery Cut-Off, Emergency Brake		